



Feboclean FL

Ink Dissolver

Feboclean FL is used to remove dried-on ink residues from machine components.

Application

- high ink dissolving performance
- removes encrusted ink
- fast evaporating
- no residues after drying process

Apply Feboclean FL with a rag to the machine parts to be cleaned. After that, wash down parts with water.

During application, care has to be taken to avoid that Feboclean FL comes into contact with printing plates or plastic parts (e. g. monitors), because incompatibilities cannot be excluded.

Wear protective gloves during application.







- 10 litre can
- 20 litre can
- 200 litre drum

Feboclean FL is classified and marked in accordance with EC - Directive 1999/45/EC - in its latest version.


All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.

Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353 50933 Cologne, Germany Phone +49 (0) 221 4907 - 1 Fax +49 (0) 221 4907 - 435 koeln@boettcher-systems.com



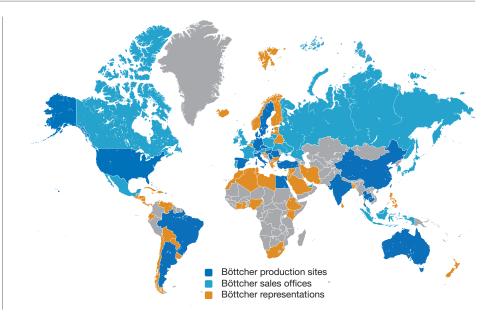

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.