

BöttcherFount N-1002

Fountain Solution Additive

BöttcherFount N-1002 is a fountain solution additive for newspaper printing.
For all types of presses and dampening units.

Application

-
- dosage range 2 - 3 % volume
 - reduced and stable water pick-up of the ink, therefore high ink density
 - very stable ink-/water balance
 - wide dampening range with reduction in water setting
 - drier copy, improving post press operations
 - clean, quick restarts of the printing plate
 - full, even solids
 - for water hardness 4 - 20° dH (total hardness)
 - pH-value 4.2 – 4.6 (depending on water hardness)
 - corrosion inhibited
 - reduced build-up of paper dust and ink on the blanket
 - effective prevention of foam
 - increased conductivity per % input: 550 µS/cm
 - density 1.09 (kg/l)

Features

Before applying BöttcherFount N-1002, the fountain system must be completely emptied and cleaned thoroughly, preferably with BöttcherPro Hydroclean.

BöttcherFount N-1002 meets the requirements of the „Corrosion Certificate of Fountain Solution Additive“, approved by press manufacturers.

Note





- 200 kg drum
- 1000 kg container

Package

BöttcherFount N-1002 is classified and marked in accordance with EC-Directive 1999/45/EC – in its latest version. BöttcherFount N-1002 is not a dangerous good in the sense of national and international transport regulations.

Marking

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
50933 Cologne, Germany
Phone +49 (0) 221 4907 - 1
Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

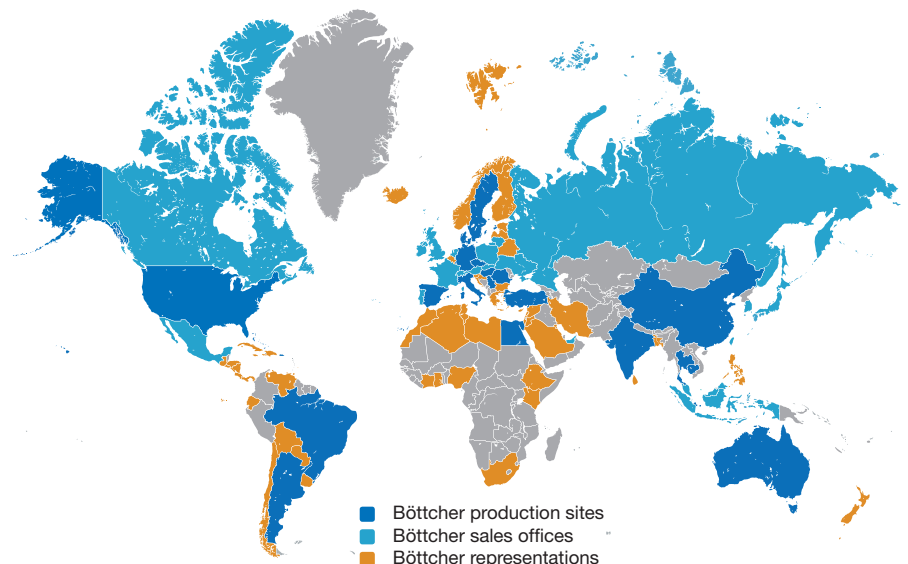

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.