

BöttcherFount N-1004 B

Fountain Solution Additive

BöttcherFount N-1004 B is a not classified fountain solution additive for newspaper printing.
For all types of presses and dampening units. Especially recommended for spray dampening units.

Application

- dosage range 2 – 3 % volume
- fast runoff, therefore less waste
- very stable ink-/ water-balance
- less residual moisture in the paper
- wide dampening range with reduction in water setting
- reduced build-up ink on dampening rollers
- reduced build-up of paper dust and ink on the blanket
- no ink feedback in the dampening solution
- good corrosion protection
- for water hardness 5 to 20° dH (total hardness)
- pH-value 4.8 – 5,0 (depending on water hardness)
- increased conductivity per % input: 200 µS/cm
- density 1,08 (kg/l)

Features

Before applying BöttcherFount N-1004 B, the fountain system must be completely emptied and cleaned thoroughly, preferably with BöttcherPro Hydroclean.

BöttcherFount N-1004 B meets the requirements of the press manufactures´ “Corrosion Certificate of Fountain Solution Additive”, approved by press manufactures.

Note





- 200 kg drum
- 600 kg container
- 1000 kg container

Package

BöttcherFount N-1004 B is classified according to EC-Directive 1999/45/EC - in its latest version and does not need to be marked.

Marking

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
50933 Cologne, Germany
Phone +49 (0) 221 4907 - 1
Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

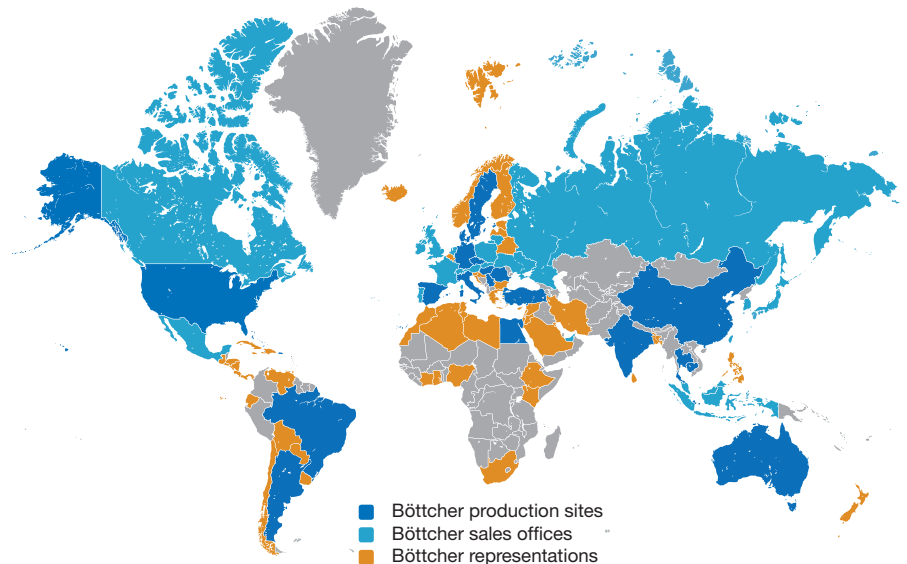

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.