

BöttcherFount N-1004 G 4.6

Fountain Solution Additive

BöttcherFount N-1004 G 4.6 is a fountain solution additive for newspaper printing with effective plate protection and improved wetting. For all types of presses, especially for turbo dampening units.

Application

-
- Dosage range 2 – 3 % volume
 - Clean, quick restarts of the printing plate
 - Very stable ink-/water balance
 - Few residual damp in the paper, therefore quick and good further processing
 - Wide dampening range with reduction of water setting
 - No water pick-up of the ink in the dampening solution
 - Increased plate protection
 - Suitable for water hardness 5 – 20°dH (total hardness)
 - pH-value at 20°C (68°F) from 4,54 to 4,64 (depends on water hardness) → 4,64 (at 2%)
 - conductivity 1180 µm/cm (at 2%)
 - density 1,099 g/cm³

Features

Before applying BöttcherFount N-1004 G 4.6m the fountain system must be completely emptied and cleaned thouroughly, preferably with BöttcherPro Slimex.

Note





- 200 kg drum
- 1.000 kg container

Package

BöttcherFount N-1004 G 4.6 is classified according to EC-Directive 1999/45/EC – in ist latest version and does not need to be marked.

BöttcherFount N-1004 G 4.6 is not a dangerous good in the sense of national and international transport regulations.

Marking

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
 50933 Cologne, Germany
 Phone +49 (0) 221 4907 - 1
 Fax +49 (0) 221 4907 - 435
 koeln@boettcher-systems.com



www.boettcher.de/contact

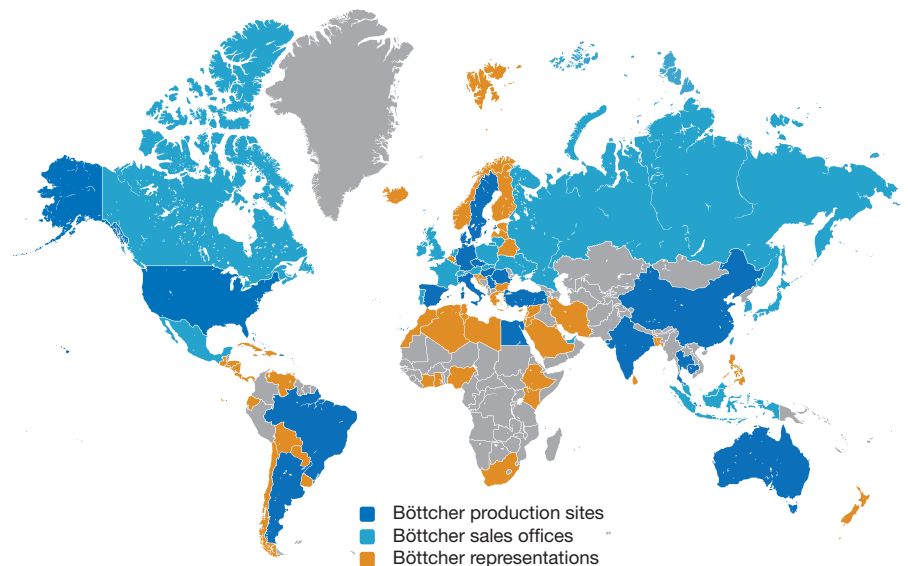

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.