

BöttcherFount N-1004 G

Fountain Solution for Coldset

BöttcherFount N-1004 G is a fountain solution additive for newspaper printing.
For all types of coldset presses and dampening units.

Application

- standard dosage 2 - 3 %
- very stable ink-water balance
- quick restarts of the printing plate
- reduced built-up of ink on dampening rollers
- for water hardness 5 - 20° dH (total hardness)
- pH-value 4.9 to 5.3 (depending on water hardness)
- corrosion inhibited
- effective prevention of foam
- increased conductivity per % input: 330 µS/cm
- density 1.10 (kg/l)

Features

Before applying BöttcherFount N-1004 G, the fountain system must be completely emptied and cleaned thoroughly, preferably with BöttcherPro Slimex.

BöttcherFount N-1004 G meets the requirements of the „Corrosion Certificate of Fountain Solution Additive“, approved by press manufacturers.

Note





- 200 kg drum
- 600 kg container
- 1.000 kg container

Package

BöttcherFount N-1004 G is classified according to EC-Directive 1999/45/EC - in its latest version and does not need to be marked.

Marking

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
 50933 Cologne, Germany
 Phone +49 (0) 221 4907 - 1
 Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

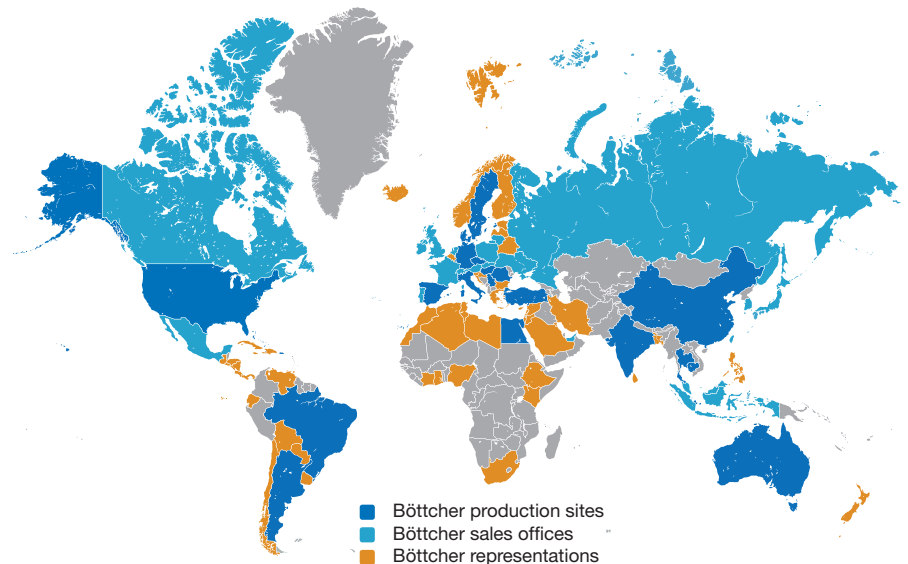

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.