








VitaWash Combi

Blanket and Roller Wash for Presses Printing Alternatively with UV and Conventional Inks

It is suitable for both manual cleaning and for use in automatic washing systems, if printing with conventional or UV inks on the same press, i. e. dual purpose printing.

VitaWash Combi may also be used for cleaning when printing with hybrid inks. Applicable especially in food packaging printing.

Application

- | | |
|---|---|
| <ul style="list-style-type: none">  flash point > 62 °C  water miscible, free of aromatics, corrosion inhibited  good dissolving power of UV drying and conventional inks  also usable for cleaning hybrid inks from rollers and blankets | <ul style="list-style-type: none">  good chemical compatibility with printing rollers for conventional inks and dual purpose printing  not suitable for 100 % UV roller qualities (EPDM)  may attack non baked positive plates - spot check required before use |
|---|---|


Features

We recommend setting the washing system to optimise the cleaning cycle and VitaWash Combi performance. In case of manual cleaning, use VitaWash Combi undiluted. Apply the wash to the blanket or roller, then finally rinse with water until all ink and cleaning agent residues have been removed.




Follow the automatic washing system manufacturers' operating instructions. If manual cleaning with a hand rag, wear protective gloves during application, follow all press safety instructions.

VitaWash Combi is certificated by ISEGA, intended use provided, it is therefore appropriate for the application in the food packaging printing.

Note





-  20 litre can
-  200 litre barrel
-  1000 litre container

Package

VitaWash Combi is classified and marked in accordance with EC - Directive 1999/45/EC - in its latest version.

VitaWash Combi is not a dangerous good in the sense of national and international transport regulations.

Marking

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
50933 Cologne, Germany
Phone +49 (0) 221 4907 - 1
Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

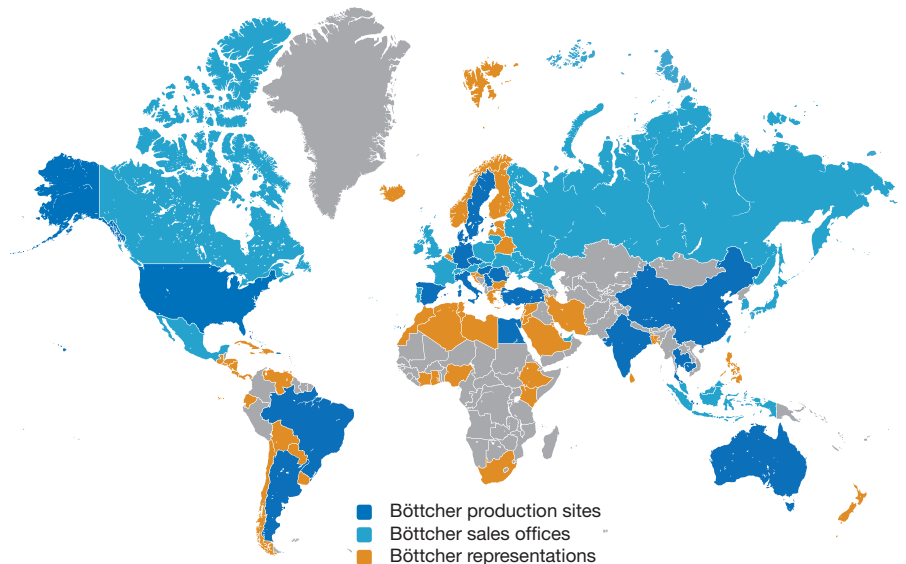

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.